

Language Diversity across the Consonant Inventories: A Study in the Framework of Complex Networks

Monojit Choudhury

Microsoft Research India, Bangalore, India – 560080

Email: monojitc@microsoft.com

Animesh Mukherjee, Anupam Basu and Niloy Ganguly

Indian Institute of Technology, Kharagpur, India – 721302

Ashish Garg and Vaibhav Jalan

Malaviya National Institute of Technology, Jaipur, India – 302017

Abstract

In this paper, we attempt to explain the emergence of the linguistic diversity that exists across the consonant inventories of some of the major language families of the world through a complex network based growth model. There is only a single parameter for this model that is meant to introduce a small amount of randomness in the otherwise preferential attachment based growth process. The experiments with this model parameter indicates that the choice of consonants among the languages within a family are far more preferential than it is across the families. The implications of this result are twofold – (a) there is an innate preference of the speakers towards acquiring certain linguistic structures over others and (b) shared ancestry propels the stronger preferential connection between the languages within a family than across them. Furthermore, our observations indicate that this parameter might bear a correlation with the period of existence of the language families under investigation.

1 Introduction

In one of their seminal papers (Hauser et al., 2002), Noam Chomsky and his co-authors remarked that if a Martian ever graced our planet then it would be awe-struck by the unique ability of the humans to communicate among themselves through the medium of language. However, if our Martian naturalist were meticulous then it might also note the surprising co-existence of 6700 such mutually unintelligible

languages across the world. Till date, the terrestrial scientists have no definitive answer as to why this linguistic diversity exists (Pinker, 1994). Previous work in the area of language evolution have tried to explain the emergence of this diversity through two different background models. The first one among these assumes that there is a set of predefined language configurations and the movement of a particular language on this landscape is no more than a random walk (Tomlin, 1986; Dryer, 1992). The second line of research attempts to relate the ecological, cultural and demographic parameters with the linguistic parameters responsible for this diversity (see for reference (Arita and Taylor, 1996; Maeda et al., 1997; Kirby, 1998; Livingstone and Fyfe, 1999; Nettle, 1999; Fought et al., 2004)).

From the above studies it turns out that linguistic diversity is an outcome of the language dynamics in terms of its evolution, acquisition and change. Like any physical system, the dynamics of a linguistic system can also be viewed from three levels (Arhem et al., 2004). On one extreme, it is a collection of utterances that are produced and perceived by the speakers of a linguistic community; this is analogous to the *microscopic* view of a thermodynamic system. On the other extreme, it can be expressed by a set of grammar rules and a lexicon; this is analogous to the *macroscopic* view. Sandwiched between these two extremes, one can also conceive a *mesoscopic* view of language, where linguistic entities such as phonemes, words or letters are the basic units and grammar is an emergent property of the interactions among these units. In the recent years, complex networks have proved to be an extremely suitable framework for modeling and studying the structure and

dynamics of linguistic systems from a mesoscopic perspective (see (Cancho and Solé, 2001; Dorogovtsev and Mendes, 2001; Cancho and Solé, 2004; Solé et al., 2005) for references).

In this work, we attempt to investigate the diversity that exists across the consonant inventories of the world’s languages through an evolutionary framework based on network growth. Along the lines of the study presented in (Choudhury et al., 2006), we model the structure of the inventories through a *bipartite* network, which has two different sets of nodes, one labeled by the languages and the other by the consonants. Edges run in between these two sets depending on whether a particular consonant is found in a particular language. This network is termed as the **Phoneme–Language Network** or **PlaNet** in (Choudhury et al., 2006). We construct five such networks that respectively represent the consonant inventories belonging to the five major language families namely, the Indo-European (IE-PlaNet), the Afro-Asiatic (AA-PlaNet), the Niger-Congo (NC-PlaNet), the Austronesian (AN-PlaNet) and the Sino-Tibetan (ST-PlaNet).

The emergence of the distribution of occurrence of the consonants across the languages of a family can be explained through a growth model for the PlaNet representing the family. We employ the *preferential attachment* based growth model introduced in (Choudhury et al., 2006) and later analytically solved in (Peruani et al., 2007) to explain this emergence for each of the five families. The model involves a single parameter that is essentially meant to introduce randomness in the otherwise predominantly preferential growth process. We observe that the families are significantly different from one another in terms of this parameter value. We further observe that if we combine the inventories for all the families together and then attempt to fit this new data with our model, the value of the parameter is significantly different from that of the individual families. This indicates that the dynamics within the families is quite different from that across them. There are possibly two factors that regulate this dynamics: the innate preference of the speakers towards acquiring certain linguistic structures over others and shared ancestry of the languages within a family. Finally, we present a brief evolutionary history of the five families and point to a possible correlation

between their age and the model parameter.

The rest of the paper is laid out as follows. Section 2 states the definition of PlaNet, briefly describes the data source and outlines the construction procedure for the five networks. In section 3 we review the growth model for the networks. In the next section, we present the experiments with the model parameter and the results obtained thereby, for each of the five families. We further explain the significance of each of these results in the same section. We conclude in section 5 by summarizing our contributions, pointing out some of the implications of the current work and indicating the possible future directions.

2 Definition and Construction of the Networks

In this section, we revisit the definition of PlaNet, discuss briefly about the data source, and explain how we constructed the networks for each of the families.

2.1 Definition of PlaNet

PlaNet is a bipartite graph $G = \langle V_L, V_C, E_{pl} \rangle$ consisting of two sets of nodes namely, V_L (labeled by the languages) and V_C (labeled by the consonants); E_{pl} is the set of edges running between V_L and V_C . There is an edge $e \in E_{pl}$ from a node $v_l \in V_L$ to a node $v_c \in V_C$ iff the consonant c is present in the inventory of the language l . Figure 1 illustrates the nodes and edges of PlaNet.

2.2 Data Source

We use the UCLA Phonological Segment Inventory Database (UPSID) (Maddieson, 1984) as the source of data for this work. The choice of this database is motivated by a large number of typological studies (Lindblom and Maddieson, 1988; Ladefoged and Maddieson, 1996; de Boer, 2000; Hinskens and Weijer, 2003) that have been carried out on it by the earlier researchers. There are 317 languages in the database with 541 consonants found across them. From these data we manually sort the languages into five groups representing the five families. Note that we included a language in any group if and only if we could find a direct evidence of its presence in the corresponding family. A brief description of each of these groups and languages found within them are listed below.

Indo-European: This family includes most of the major languages of Europe and south, central and

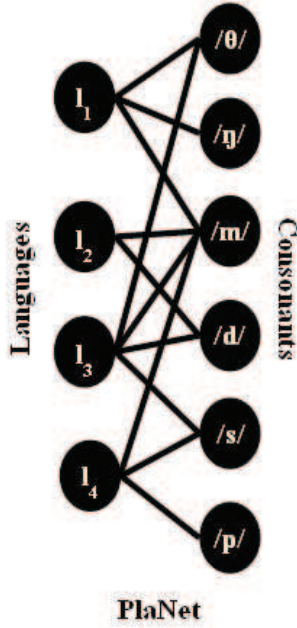


Figure 1: Illustration of the nodes and edges of PlaNet.

south-west Asia. Currently, it has around 3 billion native speakers, which is largest among all the recognized families of languages in the world. The total number of languages appearing in this family is 449. The earliest evidences of the Indo-European languages have been found to date 4000 years back.

Languages – Albanian, Lithuanian, Breton, Irish, German, Norwegian, Greek, Bengali, Hindi-Urdu, Kashmiri, Sinhalese, Farsi, Kurdish, Pashto, French, Romanian, Spanish, Russian, Bulgarian.

Afro-Asiatic: Afro-Asiatic languages have about 200 million native speakers spread over north, east, west, central and south-west Africa. This family is divided into five subgroups with a total of 375 languages. The proto-language of this family began to diverge into separate branches approximately 6000 years ago.

Languages – Shilha, Margi, Angas, Dera, Hausa, Kanakuru, Ngizim, Awiya, Somali, Iraqw, Dizi, Kefa, Kullo, Hamar, Arabic, Amharic, Socotri.

Niger-Congo: Majority of the languages that belong to this family are found in the sub-Saharan parts of Africa. The number of native speakers is around 300 million and the total number of languages is 1514. This family descends from a proto-language, which dates back 5000 years.

Languages – Diola, Temne, Wolof, Akan, Amo, Bariba, Beembe, Birom, Cham, Dagbani, Doayo,

Networks	$ V_L $	$ V_C $	$ E_{pl} $
IE-PlaNet	19	148	534
AA-PlaNet	17	123	453
NC-PlaNet	30	135	692
AN-PlaNet	12	82	221
ST-PlaNet	9	71	201

Table 1: Number of nodes and edges in the five bipartite networks corresponding to the five families.

Efik, Ga, Gbeya, Igbo, Ik, Koma, Lelemi, Senadi, Tampulma, Tarok, Teke, Zande, Zulu, Kadugli, Moro, Bisa, Dan, Bambara, Kpelle.

Austronesian: The languages of the Austronesian family are widely dispersed throughout the islands of south-east Asia and the Pacific. There are 1268 languages in this family, which are spoken by a population of 6 million native speakers. Around 4000 years back it separated out from its ancestral branch.

Languages – Rukai, Tsou, Hawaiian, Iai, Adzera, Kaliai, Roro, Malagasy, Chamorro, Tagalog, Batak, Javanese.

Sino-Tibetan: Most of the languages in this family are distributed over the entire east Asia. With a population of around 2 billion native speakers it ranks second after Indo-European. The total number of languages in this family is 403. Some of the first evidences of this family can be traced 6000 years back.

Languages – Hakka, Mandarin, Taishan, Jingpho, Ao, Karen, Burmese, Lahu, Dafla.

2.3 Construction of the Networks

We use the consonant inventories of the languages enlisted above to construct the five bipartite networks – IE-PlaNet, AA-PlaNet, NC-PlaNet, AN-PlaNet and ST-PlaNet. The number of nodes and edges in each of these networks are noted in Table 1.

3 The Growth Model for the Networks

As mentioned earlier, we employ the growth model introduced in (Choudhury et al., 2006) and later (approximately) solved in (Peruani et al., 2007) to explain the emergence of the *degree distribution* of the consonant nodes for the five bipartite networks. For the purpose of readability, we briefly summarize the idea below.

Degree Distribution: The degree of a node v , denoted by k , is the number of edges incident on v . The degree distribution is the fraction of nodes p_k that have a degree equal to k (Newman, 2003). The cumulative degree distribution P_k is the fraction of nodes having degree greater than or equal to k . Therefore, if there are N nodes in a network then,

$$P_k = \sum_{k=k'}^N p_{k'} \quad (1)$$

Model Description: The model assumes that the size of the consonant inventories (i.e., the degree of the language nodes in PlaNet) are known *a priori*.

Let the degree of a language node $L_i \in V_L$ be denoted by d_i (i.e., d_i refers to the inventory size of the language L_i in UPSID). The consonant nodes in V_C are assumed to be unlabeled, i.e, they are not marked by the articulatory/acoustic features (see (Trubetzkoy, 1931) for further reference) that characterize them. The nodes L_1 through L_{317} are sorted in the ascending order of their degrees. At each time step a node L_j , chosen in order, preferentially gets connected to d_j *distinct* nodes (call each such node C) of the set V_C . The probability $Pr(C)$ with which the node L_j gets connected to the node C is given by,

$$Pr(C) = \frac{k + \epsilon}{\sum_{C'} (k' + \epsilon)} \quad (2)$$

where, k is the current degree of the node C , C' represents the nodes in V_C that are not already connected to L_j and ϵ is the model parameter that is meant to introduce a small amount of randomness into the growth process. The above steps are repeated until all the language nodes $L_j \in V_L$ get connected to d_j consonant nodes.

Peruani et al. (2007) have shown that after some simplifications one can exactly solve this model analytically. Let the average consonant inventory size be denoted by μ and the number of consonant nodes be N . The simplified model assumes that at each time step t a language node gets attached to μ consonant nodes, following the distribution $Pr(C)$. Under the above assumptions, the degree distribution $p_{k,t}$ for the consonant nodes, obtained by solving the model, is a β -distribution as follows

$$p_{k,t} \simeq A \left(\frac{k}{t} \right)^{\epsilon-1} \left(1 - \frac{k}{t} \right)^{\frac{N\epsilon}{\mu} - \epsilon - 1} \quad (3)$$

where A is a constant term. Using equations 1 and 3 one can easily compute the value of $P_{k,t}$. There is a subtle point that needs a mention here. The concept of a *time step* is very crucial for a growing network. It might refer to the addition of an edge or a node to the network. While these two concepts coincide when every new node has exactly one edge, there are obvious differences when the new node has degree greater than one. The analysis presented in Peruani et al. (2007) holds good for the case when only one edge is added per time step. However, if the degree of the new node being introduced to the system is much less than N , then Eq. 3 is a good approximation of the emergent degree distribution for the case when a node with more than one edge is added per time step. Therefore, the experiments presented in the next section attempt to fit the degree distribution of the real networks with Eq. 3 by tuning the parameter ϵ .

4 Experiments and Results

In this section, we attempt to fit the degree distribution of the five empirical networks with the expression for $P_{k,t}$ described in the previous section. For all the experiments we set $N = 541$, $t =$ number of languages in the family under investigation and $\mu =$ average degree of the language nodes of the PlaNet representing the family under investigation, that is, the average inventory size for the family. Therefore, given the value of k we can compute $p_{k,t}$ and consequently, $P_{k,t}$, if ϵ is known. We vary the value of ϵ such that the logarithmic standard error (*LSE*) between the degree distribution of the real network and the equation is least. *LSE* is defined as the sum of the square of the difference between the logarithm of the ordinate pairs (say y and y') for which the abscissas are equal. In other words $LSE = (\log y - \log y')^2$. The best fits obtained for each of the five networks are shown in Figure 2. The values of ϵ and the corresponding least *LSE* for each of them are noted in Table 2. Note that since we varied ϵ in steps of 0.005 during the experiments, some of the differences in the values of ϵ in Table 2 are not significant. Nevertheless, there are certain observations described below that are statistically significant according to the above experiments.

Observation I: The very low value of the parameter ϵ indicates that the choice of consonants within the languages of a family is strongly preferential.

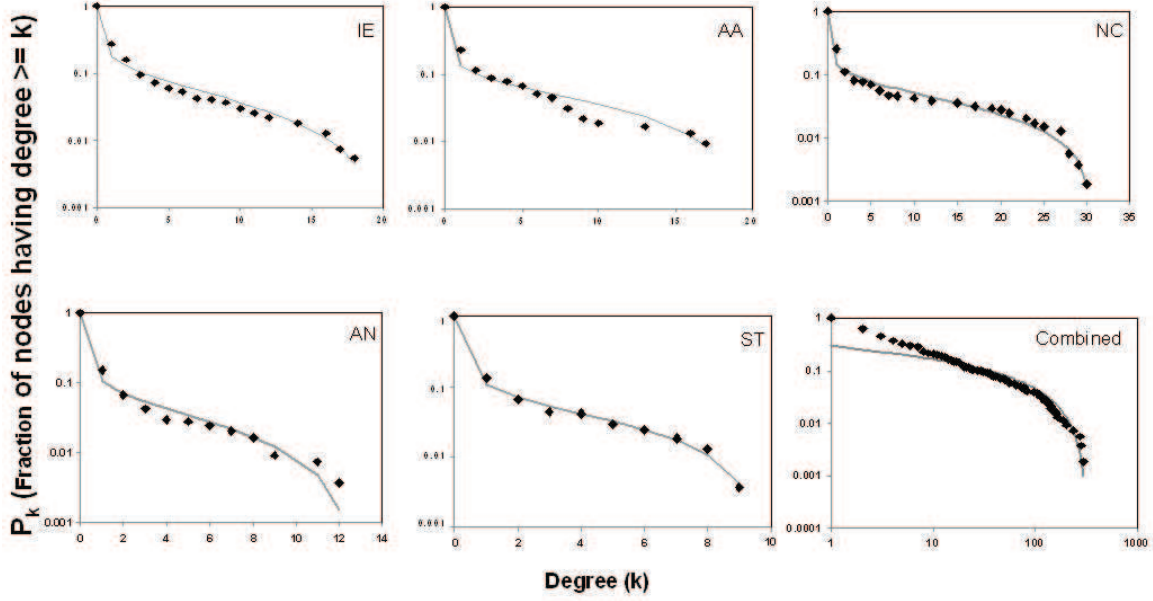


Figure 2: The degree distribution of the different real networks along with the fits obtained from the equation for the optimal values of ϵ . Black dots indicate plots for the real networks while the grey lines represent the curves obtained from the equation. For each of the families, the y-axis is in log-scale. The last figure showing the curve for the Combined-PlaNet is in doubly logarithmic scale.

Network	ϵ for least LSE	Value of LSE
IE-PlaNet	0.055	0.16
AA-PlaNet	0.040	0.24
NC-PlaNet	0.035	0.19
AN-PlaNet	0.030	0.17
ST-PlaNet	0.035	0.03
Combined-PlaNet	0.070	1.47

Table 2: The values of ϵ and the least LSE for the different networks. Combined-PlaNet refers to the network constructed after mixing all the languages from all the families. For all the experiments

This innate preference for acquiring a particular set of consonants tends to grow over the linguistic generations (Blevins, 2004). In this context, ϵ may be thought of as modeling the (accidental) errors or drifts that can occur during language transmission. The fact that the values of ϵ across the four major language families, namely Afro-Asiatic, Niger-Congo, Sino-Tibetan and Austronesian, are comparable indicates that the rate of error propagation is a universal factor that is largely constant across the families. The value of ϵ for IE-PlaNet is slightly higher than the other four families, which might be an effect of higher diversification within the family due to geographical or socio-political factors. Nevertheless, it is still smaller than the ϵ of the Combined-PlaNet.

The optimal ϵ obtained for Combined-PlaNet is

higher than that of all the families (see Table 2), though it is comparable to the Indo-European PlaNet. This points to the fact that the choice of consonants within the languages of a family is far more preferential than it is across the families; this fact is possibly an outcome of shared ancestry. In other words, the inventories of genetically related languages are similar (i.e., they share a lot of consonants) because they have evolved from the same parent language through a series of linguistic changes, and the chances that they use a large number of consonants used by the parent language is naturally high.

Observation II: We observe a very interesting relationship between the approximate age of the language family and the values of ϵ obtained in each case (see Table 4). The only anomaly is the Indo-European branch, which possibly indicates that this might be much older than it is believed to be. In fact, a recent study (Balter, 2003) has shown that the age of this family dates back to 8000 years. If this last argument is assumed to be true then the values of ϵ have a one-to-one correspondence with the approximate period of existence of the language families. As a matter of fact, this correlation can be intuitively justified – higher is the period of existence of a family higher are the chances of its diversification into smaller subgroups, which in

turn increases the chances of transmission errors and hence, the values of ϵ comes out to be more for the older families. It should be noted that the difference between the values of ϵ for the language families are not statistically significant. Therefore, the aforementioned observation should be interpreted only as an interesting possibility; more experimentation is required for making any stronger claim.

4.1 Control Experiment

How could one be sure that the aforementioned observations are not an obvious outcome of the construction of the PlaNet or some spurious correlations? To this end, we conduct a control experiment where a set of inventories is randomly selected from UPSID to represent a family. The number of languages chosen is same as that of the PlaNets of the various language families. We observe that the average value of ϵ for these randomly constructed PlaNets is 0.068, which, as one would expect, is close to that of the Combined-PlaNet. This reinforces the fact that the inherent proximity among the languages of a real family is not a consequence “by chance”.

4.2 Correlation between Families

Another way to verify the above observation is to estimate the correlation between the frequency of occurrence of the consonants for the different language family pairs (i.e., how the frequencies of the consonants /p/, /t/, /k/, /m/, /n/ ... are correlated across the different families). Table 3 notes the value of this correlation among the five families. The values in Table 3 indicate that, in general, the families are very weakly correlated with each other, the average correlation being as low as ~ 0.47 .

Note that, the correlation between the Afro-Asiatic and the Niger-Congo families is high not only because they share the same African origin, but also due to higher chances of language contacts among their groups of speakers. On the other hand, the Indo-European and the Sino-Tibetan families show least correlation because it is usually believed that they share absolutely no genetic connections. Interestingly, similar trends are observed for the values of the parameter ϵ . If we combine the languages of the Afro-Asiatic and the Niger-Congo families and try to fit the new data then ϵ turns out to be 0.035 while if we do the same for the Indo-European and the Sino-Tibetan fam-

Families	IE	AA	NC	AN	ST
IE	–	0.49	0.48	0.42	0.25
AA	0.49	–	0.66	0.53	0.43
NC	0.48	0.66	–	0.55	0.37
AN	0.42	0.53	0.55	–	0.50
ST	0.25	0.43	0.37	0.50	–

Table 3: The Pearson’s correlation between the frequency distributions obtained for the family pairs. IE: Indo-European, AA: Afro-Asiatic, NC: Niger-Congo, AN: Austronesian, ST: Sino-Tibetan.

Families	Age (in years)	ϵ
Austronasean	4000	0.030
Niger-Congo	5000	0.035
Sino-Tibetan	6000	0.035
Afro-Asiatic	6000	0.040
Indo-European	4000 (or 8000)	0.055

Table 4: Table showing the relationship between the age of a family and the value of ϵ .

ilies then ϵ is 0.058. For many of the other combinations the value of ϵ and the correlation coefficient have a one-to-one correspondence. However, there are clear exceptions also. For instance, if we combine the Afro-Asiatic and the Indo-European families then the value of ϵ is very low (close to 0.04) although the correlation between them is not very high. The reasons for these exceptions should be interesting and we plan to further explore this issue in future.

5 Conclusion

In this paper, we presented a method of network evolution to capture the emergence of linguistic diversity that manifests in the five major language families of the world. The bipartite network based growth model that we proposed in this paper can be associated with the process of language acquisition by an individual, which largely governs the course of language change in a linguistic community. In the initial years of language development every child passes through a stage called *babbling* during which he/she learns to produce non-meaningful sequences of consonants and vowels, some of which are not even used in the language to which they are exposed (Jakobson, 1968; Locke, 1983). Clear preferences can be observed for learning certain sounds such as plosives and nasals, whereas fricatives and liquids are avoided. In fact, this hierarchy of preference during the babbling stage follows the cross-linguistic fre-

quency distribution of the consonants. This innate frequency dependent preference towards certain phonemes might be because of phonetic reasons (i.e., for articulatory/perceptual benefits). In the current model, this innate preference gets captured through the process of preferential attachment.

In fact, preferential attachment (PA) is a universally observed evolutionary mechanism that is known to shape several physical, biological and socio-economic systems (Newman, 2003). This phenomenon has also been called for to explain various linguistic phenomena (Choudhury and Mukherjee, to appear). We believe that PA also provides a suitable abstraction for the mechanism of language acquisition. Acquisition of vocabulary and growth of the mental lexicon are few examples of PA in language acquisition. This work illustrates another variant of PA applied to explain the structure of consonant inventories and their diversification across the language families.

References

- [Arhem et al.2004] P. Arhem, H. A. Braun, M. T. Huber and H. Liljenstrom. 2004. *Micro-Meso-Macro: Addressing Complex Systems Couplings*. World Scientific.
- [Arita and Taylor1996] T. Arita and C. E. Taylor. 1996. A simple model for the evolution of communication. In L. J. Fogel, P. J. Angeline and T. Bäck, editors, *The Fifth Annual Conference On Evolutionary Programming*, 405–410. MIT Press.
- [Balter2003] M. Balter. 2003. Early date for the birth of Indo-European languages. *Science* **302**(5650), 1490.
- [Barabási and Albert1999] A.-L. Barabási and R. Albert. 1999. Emergence of scaling in random networks. *Science* **286**, 509–512.
- [Bickerton1990] D. Bickerton. 1990. *Language and Species*, The University of Chicago Press, Chicago.
- [Blevins2004] J. Blevins. 2004. *Evolutionary Phonology: The Emergence of Sound Patterns*, Cambridge University Press, Cambridge.
- [de Boer2000] B. de Boer. 2000. Self-organization in vowel systems. *Journal of Phonetics*, **28**(4), 441–465.
- [Cancho and Solé2001] R. Ferrer i Cancho and R. V. Solé. 2001. The small-world of human language. *Proceedings of the Royal Society of London, Series B, Biological Sciences*, **268**(1482), 1228–1235.
- [Cancho and Solé2004] R. Ferrer i Cancho and R. V. Solé. 2004. Patterns in syntactic dependency networks. *Phys. Rev. E*, **69**(051915).
- [Choudhury et al.2006] M. Choudhury, A. Mukherjee, A. Basu and N. Ganguly. 2006. Analysis and synthesis of the distribution of consonants over languages: A complex network approach. *Proceedings of the 21st International Conference on Computational Linguistics and 44th Annual Meeting of the Association for Computational Linguistics, Main Conference Poster Sessions*, 128–135.
- [Choudhury and Mukherjeeto appear] M. Choudhury and A. Mukherjee. to appear. The structure and dynamics of linguistic networks. In N. Ganguly, A. Deutsch and A. Mukherjee, editors, *Dynamics on and of Complex Networks: Applications to Biology, Computer Science, Economics, and the Social Sciences*, Birkhauser, Springer, Boston.
- [Dorogovtsev and Mendes2001] S. N. Dorogovtsev and J. F. F. Mendes. 2001. Language as an evolving word web. *Proceedings of the Royal Society of London, Series B, Biological Sciences*, **268**(1485), 2603–2606.
- [Dryer1992] M. S. Dryer. 1992. The Greenbergian word order correlations. *Language*, **68**, 81–138.
- [Fought et al.2004] J. G. Fought, R. L. Munroe, C. R. Fought and E. M. Good. 2004. Sonority and climate in a world sample of languages: Findings and prospects. *Cross-Cultural Research*, **38**(1), 27–51.
- [Hauser et al.2002] M. D. Hauser, N. Chomsky and W. T. Fitch. 2002. The faculty of language: What is it, who has it, and how did it evolve? *Science*, **298**, 1569–1579.
- [Hinskens and Weijer2003] F. Hinskens and J. Weijer. 2003. Patterns of segmental modification in consonant inventories: a cross-linguistic study. *Linguistics*, **41**(6), 1041–1084.
- [Jakobson1968] R. Jakobson. 1968. *Child Language, Aphasia and Phonological Universals*. The Hague: Mouton.
- [Jeong et al.2000] H. Jeong, B. Tombor, R. Albert, Z. N. Oltvai and A. L. Barabási. 2000. The large-scale organization of metabolic networks. *Nature*, **406**, 651–654.
- [Kirby1998] S. Kirby. 1998. Fitness and the selective adaptation of language. In J. R. Hurford, M. Studdert-Kennedy and C. Knight, editors, *Approaches to the Evolution of Language: Social and Cognitive Bases*, 359–383. Cambridge: Cambridge University Press.
- [Ladefoged and Maddieson1996] P. Ladefoged and I. Maddieson. 1996. *Sounds of the Worlds Languages*, Oxford: Blackwell.

- [Lindblom and Maddieson1988] B. Lindblom and I. Maddieson. 1988. Phonetic universals in consonant systems. In L.M. Hyman and C.N. Li, eds., *Language, Speech, and Mind*, Routledge, London, 62–78.
- [Livingstone and Fyfe1999] D. Livingstone and C. Fyfe. 1999. Modelling the evolution of linguistic diversity. In D. Floreano, J. Nicoud and F. Mondada, editors, *ECAL 99*, 704–708, Berlin: Springer-Verlag.
- [Locke1983] J. L. Locke. 1983. *Phonological Acquisition and Change*. Academic Press New York.
- [Maddieson1984] I. Maddieson. 1984. *Patterns of Sounds*, Cambridge University Press, Cambridge.
- [Maeda et al.1997] Y. Maeda, T. Sasaki and M. Tokoro. 1997. Self re-organizing of language triggered by “Language Contact”. *ECAL 97*, MIT Press.
- [Nettle1999] D. Nettle. 1999. Is the rate of linguistic change constant? *Lingua*, **108**(2):119–136.
- [Newman2001b] M. E. J. Newman. 2001. Scientific collaboration networks. *Physical Review E* **64**, 016131.
- [Newman2003] M. E. J. Newman. 2003. The structure and function of complex networks. *SIAM Review* **45**, 167–256.
- [Peruani et al.2007] F. Peruani, M. Choudhury, A. Mukherjee and N. Ganguly. 2007. Emergence of a non-scaling degree distribution in bipartite networks: a numerical and analytical study. *Euro. Phys. Letters* **76**, 28001 (p1–p6).
- [Pinker1994] S. Pinker. 1994. *The Language Instinct*, New York: William Morrow.
- [Pulleyblank1993] E. Pulleyblank. 1993. The typology of Indo-European. *Journal of Indo-European Studies*, p. 109.
- [Ramasco et al.2004] José J. Ramasco, S. N. Dorogovtsev, and Romualdo Pastor-Satorras. 2004. Self-organization of collaboration networks. *Physical Review E*, **70**, 036106.
- [Solé et al.2005] R. V. Solé, B. C. Murtra, S. Valverde and L. Steels. 2005. Language networks: Their structure, function and evolution. *Santa Fe working paper*, 05-12-042.
- [Tomlin1986] R. Tomlin. 1986. *Basic Word Order: Functional Principles*, Croom Helm, London.
- [Trubetzkoy1931] N. Trubetzkoy. 1931. Die phonologischen systeme. *TCLP* **4**, 96–116.